

# 8A8DLTP-DEKA

## SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	250Ah
Capacity at C/20	245Ah
Weight	163 lbs. (74 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-40°F (-40°C) - 140°F (60°C)



Vent	Self-sealing
Terminal	T (T975)



Rated UN2794 - Wet, Filled with Acid

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:

## Valve-Regulated, Absorbed Glass Mat Technology




## DIMENSIONS

*Inches (mm)*

Length	<b>21.03 (534 mm)</b> <i>Including handles</i>
Width	<b>11.00 (279 mm)</b>
Height	<b>10.82 (275 mm)</b> <i>Including terminals</i>

AGM Cycle Life vs. Depth of Discharge at +25°C (77°F)  
Based on BCI 2-hour Capacity

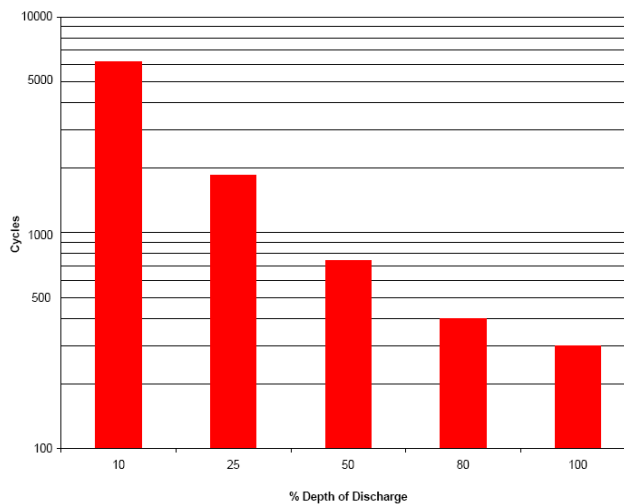

**Solar Electric Supply, Inc.**

Toll Free: 877-297-0014 • [www.solarelectricsupply.com](http://www.solarelectricsupply.com)



**SOLAR  
ELECTRIC  
SUPPLY, INC.**